


# CHAPTER 9



## OTHER AIROUTLETS

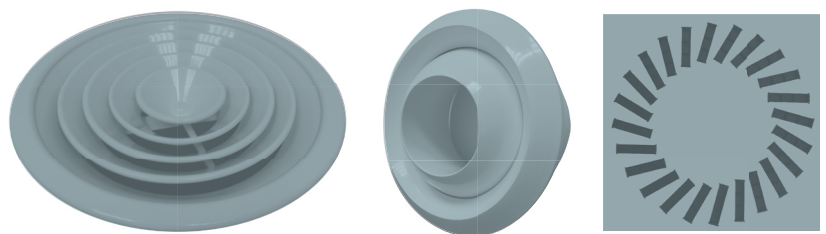

**CONTENTS**

**CIRCULAR CEILING DIFFUSER (FIXED CORE)**  
INTRODUCTION & OPERATING RANGE

**CIRCULAR CEILING DIFFUSER (FIXED CORE)**  
DETAILS & DIMENSIONS

**CIRCULAR CEILING DIFFUSER (FIXED CORE)**  
TABULAR SELECTION

**JET NOZZLE DIFFUSER ( BALL TYPE )**  
INTRODUCTION

**JET NOZZLE DIFFUSER ( BALL TYPE )**  
DETAILS, DIMENSIONS & SELECTION

**SWIRL DIFFUSER**  
INTRODUCTION

**SWIRL DIFFUSER**  
DETAILS, DIMENSIONS & SELECTION

**OTHER AIROUTLETS**



# CIRCULAR CEILING DIFFUSER (FIXED CORE)



## Model CSCD C/W BFD (FIXED CORE)

This model of circular Diffuser is totally different in its design, construction & concept from our one mentioned in chapter # 10. In this model core (Inner cones) is :

- Fixed.
- Flushed to the frame.
- Can't be adjusted vertically up or down.
- But still removable from the face.

Each diffuser already equipped with ABS (plastic) butterfly damper in black color as standard.



### Features & Characteristics :

- Frame & inner cones (core) are made of high quality Aluminum sheet pressed to give the circular shape.
- Damper (Butterfly type): made of ABS (plastic) in black color.
- The inner cones (core) are designed in conical shape, modern styling & easy removable allowing for easy installation, balancing, cleaning, damper adjustment & access to duct system.
- Available in 5 standard sizes ranging from 150 mm to 350 mm Ø in 50 mm increments.
- Provided with standard sealing sponge gasket fixed backside of each diffuser.
- Provided with G.I. assembly bridge & screws for easy installation.
- Good for installations between 2.6 to 4.1 mtr height.





### OPERATING RANGE & QUICK SELECTION TABLE

Nominal Neck size (N)		CFM Range
mm	Inch	
150 Ø	6" Ø	60 to 200
200 Ø	8" Ø	120 to 320
250 Ø	10" Ø	180 to 470
300 Ø	12" Ø	240 to 630
350 Ø	14" Ø	300 to 820

- @ Max 40 dBA.

# CIRCULAR CEILING DIFFUSER ( Fixed core )

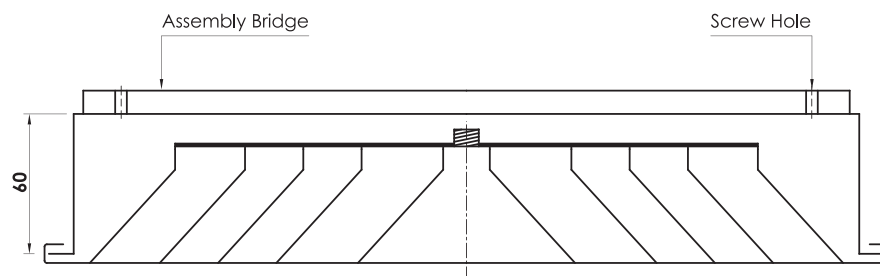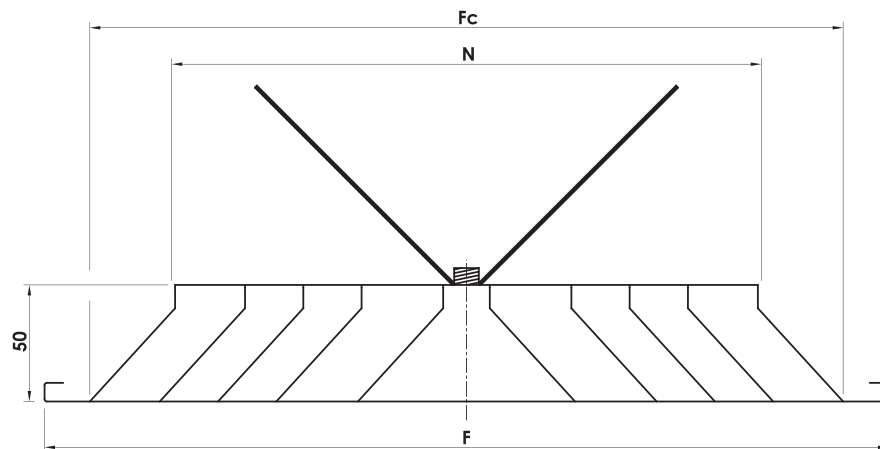

NECK & OTHER DIMENSIONS				
Nominal Neck size (N)		Dimensions in mm		No. of cones
mm	Inch	F Ø	Fc Ø	
150 Ø	6" Ø	262	214	2
200 Ø	8" Ø	304	256	3
250 Ø	10" Ø	362	314	4
300 Ø	12" Ø	401	353	5
350 Ø	14" Ø	452	404	6

• All Dimensions are in mm and subject to ± 2mm tolerance.

# CIRCULAR CEILING DIFFUSER ( Fixed core )



## Engineering & Performance Data

### TABULAR SELECTION FOR CSCD C/W BFD (FIXED CORE)

CFM	SIZE ▶	150 mm	200 mm	250 mm	300 mm	350 mm	CFM	SIZE ▶	150 mm	200 mm	250 mm	300 mm	350 mm
60	Vel	2.75	1.20	0.77	0.54	0.40	420	Vel		8.37	5.42	3.37	2.82
	Δ P	0.70	0.28	0.23	0.21	0.20		Δ P		4.91	2.17	1.14	0.72
	Th. min	0.50	0.33	0.27	0.22	0.19		Th. min		2.30	1.85	1.54	1.33
	Th. max	0.92	0.70	0.61	0.55	0.51		Th. max		3.32	2.72	2.31	2.04
	dbA	< 15	< 15	< 15	< 15	< 15		dbA		47	37	29	21
90	Vel	4.12	1.79	1.16	0.81	0.60	480	Vel			6.20	4.31	3.22
	Δ P	1.33	0.40	0.28	0.23	0.21		Δ P			2.78	1.44	0.89
	Th. min	0.75	0.49	0.40	0.33	0.29		Th. min			2.11	1.76	1.52
	Th. max	1.25	0.92	0.79	0.70	0.64		Th. max			3.08	2.61	2.29
	dbA	< 15	< 15	< 15	< 15	< 15		dbA			41	32	25
120	Vel	5.50	2.39	1.55	1.08	0.81	540	Vel			6.97	4.84	3.67
	Δ P	2.22	0.57	0.35	0.27	0.23		Δ P			3.47	1.77	1.07
	Th. min	1.00	0.66	0.53	0.44	0.38		Th. min			2.38	1.98	1.72
	Th. max	1.59	1.13	0.96	0.85	0.77		Th. max			3.43	2.90	2.55
	dbA	< 15	< 15	< 15	< 15	< 15		dbA			44	36	29
150	Vel	6.87	2.99	1.94	1.35	1.01	600	Vel			7.75	5.38	4.03
	Δ P	3.37	0.79	0.44	0.31	0.26		Δ P			4.23	2.14	1.28
	Th. min	1.24	0.82	0.66	0.55	0.48		Th. min			2.64	2.20	1.91
	Th. max	1.92	1.35	1.14	0.99	0.89		Th. max			3.78	3.19	2.80
	dbA	32	18	< 15	< 15	< 15		dbA			8.52	39	32
180	Vel	8.25	3.59	2.32	1.61	1.21	660	Vel			5.08	5.92	4.43
	Δ P	4.77	1.05	0.55	0.36	0.29		Δ P			2.91	2.55	1.51
	Th. min	1.49	0.99	0.79	0.66	0.57		Th. min			4.13	2.42	2.10
	Th. max	2.25	1.57	1.32	1.14	1.02		Th. max			50	3.49	3.05
	dbA	37	24	< 15	< 15	< 15		dbA				41	34
210	Vel	9.62	4.18	2.71	1.88	1.41	720	Vel				6.46	4.84
	Δ P	6.42	1.37	0.68	0.43	0.32		Δ P				3.00	1.76
	Th. min	1.74	1.15	0.93	0.77	0.67		Th. min				2.64	2.29
	Th. max	2.58	1.79	1.49	1.29	1.15		Th. max				3.78	3.31
	dbA	41	28	18	< 15	< 15		dbA				44	37
240	Vel	10.99	4.78	3.10	2.15	1.61	780	Vel				7.00	5.24
	Δ P	8.33	1.73	0.83	0.50	0.36		Δ P				3.49	2.04
	Th. min	1.99	1.31	1.06	0.88	0.76		Th. min				2.86	2.48
	Th. max	2.91	2.01	1.67	1.43	1.28		Th. max				4.07	3.56
	dbA	45	32	21	< 15	< 15		dbA				46	39
270	Vel	12.37	5.38	3.49	2.42	1.81	900	Vel					6.05
	Δ P	10.50	2.14	1.01	0.58	0.41		Δ P					2.65
	Th. min	2.24	1.48	1.19	0.99	0.86		Th. min					2.86
	Th. max	3.24	2.23	1.84	1.58	1.40		Th. max					4.07
	dbA	48	35	25	16	< 15		dbA					43
300	Vel		5.98	3.87	2.69	2.02	1,000	Vel					6.85
	Δ P		2.60	1.20	0.67	0.46		Δ P					3.35
	Th. min		1.64	1.32	1.10	0.95		Th. min					3.24
	Th. max		2.45	2.02	1.73	1.53		Th. max					4.58
	dbA		38	28	19	< 15		dbA					46
360	Vel		7.17	4.65	3.23	2.42	1,200	Vel					7.66
	Δ P		3.66	1.64	0.89	0.58		Δ P					4.14
	Th. min		1.97	1.59	1.32	1.14		Th. min					3.62
	Th. max		2.88	2.37	2.02	1.78		Th. max					5.08
	dbA		43	33	24	17		dbA					50

Vel = Velocity (m/s)  
 Δ P = Pressure Drop (mm. wg)  
 Th. min = Throw, Minimum (m)  
 Th. max = Throw, Maximum (m)  
 dbA = Noise level (dbA)


### Model : JET NOZZLE DIFFUSER (BALL TYPE)

The ball type Jet Nozzles with variable diffusion directions are particularly designed for Air Conditioning systems which require long concentrated throws in order to reach areas which are distant from the duct system or hidden by structural elements.

Jet Nozzles of ball type can be utilized for both vertical & horizontal air diffusion, thanks for their easy orientation in all directions around 360°, also the minimum construction tolerance & an accurate smooth finish of the spherical body together with its surrounding ring guarantees easy & precise movement.

### Features & Characteristics :

- Spherical body & its ring are made of high quality Aluminum sheet pressed to give the ball shape.
- The ball can be oriented around 360°.
- Fixing ring is provided with holes for easy screw installation.
- An extra covering ring is provided to conceal the fixing screws (turning this ring clockwise is only what you need to fit it in place).
- The built in circular neck provided at the backside of each diffuser allows for easy connection to flexible duct.
- A double felt seal between the ball body & its ring permits a perfect seal & a self locking position once desired angle has been chosen.
- Available in five standard sizes 150, 200, 250, 315 & 400 Ø mm.
- Good for installations between 2.8 to 30 mtr height.

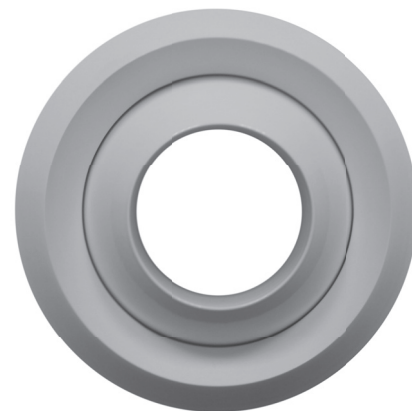




# JET NOZZLE DIFFUSER ( BALL TYPE )



Nominal Size (N)	Neck & other Dimensions				
	N Ø	D Ø	F Ø	A	B
150 Ø	145	75	198	80	23
200 Ø	198	105	261	105	30
250 Ø	247	130	316	135	35
315 Ø	314	162	392	170	40
400 Ø	398	210	495	215	55

• All Dimensions are in mm and subject to  $\pm 2$ mm tolerance.

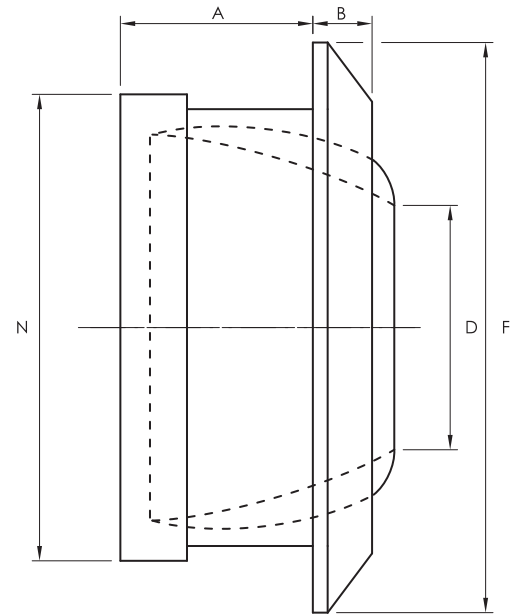

## OPERATING RANGE & QUICK SELECTION TABLE


Nominal Size (N)	A <sub>eff.</sub> (m <sup>2</sup> )	CFM RANGE	Throw @Vt=0.25m/s (m)	Pressure drop $\Delta P$ (Pa)	Noise Level (dBA)
150 Ø	0.00503	65 - 225	18.0 - 31.50	24 - 275	<20 - 41
200 Ø	0.00950	125 - 425	21.0 - 33.50	23 - 277	<20 - 46
250 Ø	0.01360	175 - 620	21.5 - 34.00	24 - 277	<20 - 46
315 Ø	0.01770	225 - 790	22.0 - 35.00	23 - 275	<20 - 47
400 Ø	0.03142	400 - 1400	25.0 - 37.00	23 - 276	<20 - 49

## Model : SWD 16 / 24 / 48


The swirl Diffuser with manual adjustment deflectors has been especially developed to enable the direction of air discharge to be altered on site to cater for any changes in room layout or partitions. Due to the rotary swirling motion of the air discharge, induction of room air occurs very quickly resulting in a rapid decay of supply air velocity & temperature difference so that a large number of air changes (up to 30 per hour) can be obtained with temperature difference between + 10 c° & - 10 c°.

### Features & Characteristics :


- Face plate (panel) made of high quality steel sheet finished in white powder coating in standard size 595\*595 mm outer dimensions.
- Ready to fit in standard 600\*600 mm false ceiling tile.
- The control deflectors are made from plastic (ABS) in black color as standard.
- Each deflector is singularly adjustable & fit in place to give the final geometry.
- The pivoting deflectors can be set in different positions in order to vary the direction of discharged air. By turning all deflectors in the same direction (set @45°), the air flow will discharge in the form of centrifugal swirl motion, in this case this diffuser will be suitable for all applications which require high induction for heating & cooling.
- Available in three different options of number of deflectors giving different quantity of air flow, thus 16, 24 & 48 deflectors.

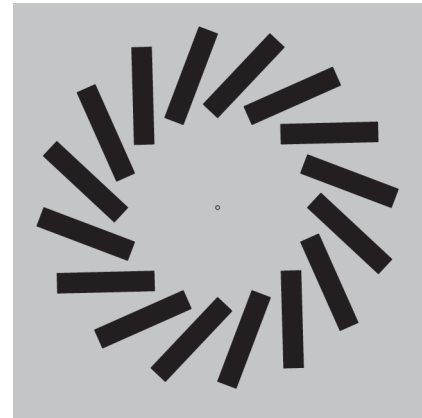

SWD 16

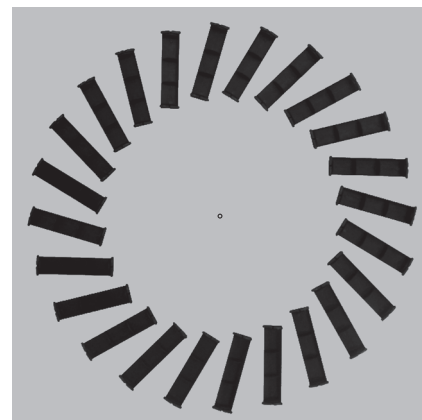


SWD 24

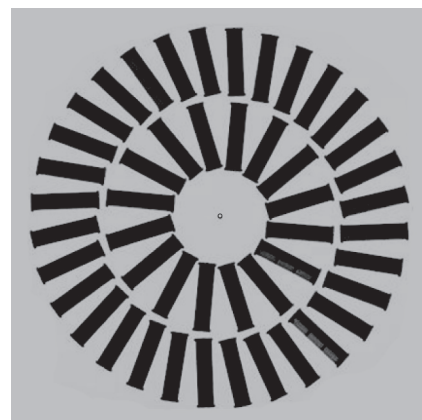

SWD 48

# SWIRL DIFFUSER

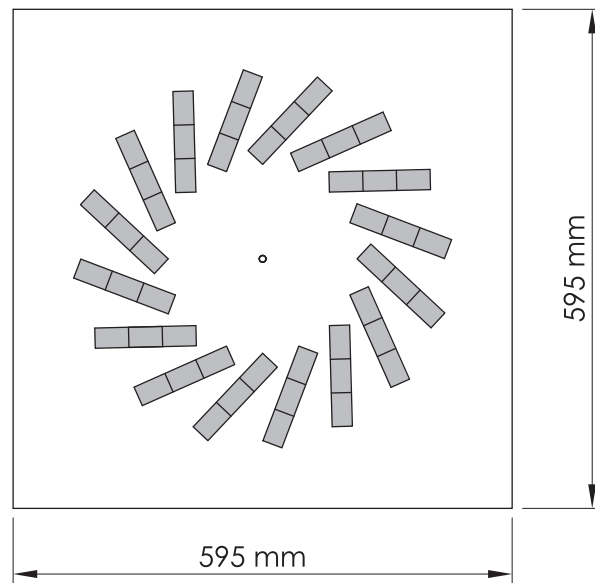

**OPERATING RANGE & QUICK SELECTION TABLE**

Model	Outer Size (mm)	Number of Deflectors	A <sub>eff.</sub> (m <sup>2</sup> )	CFM Range	Throw @Vt=0.25m/s (m)	Pressure drop Δ P (Pa)	Noise Level (dBA)
SWD 16	595 x 595	16	0.022	90 - 320	<1 - 6.1	6 - 71	<20 - 54
SWD 24	595 x 595	24	0.032	135 - 480	<1 - 7.3	6 - 72	<20 - 51
SWD 48	595 x 595	48	0.043	185 - 600	<1 - 6.4	6 - 62	<20 - 54



A series of horizontal dotted lines for writing, spanning the width of the page.





A series of horizontal dotted lines for writing, spanning the width of the page.





A series of horizontal dotted lines spanning the width of the page, intended for handwritten notes or text.

